

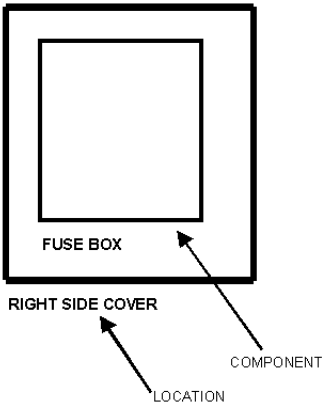


GENERAL NOTES:


1. ORIENTATION - WHERE PRACTICAL, THESE WIRING DIAGRAMS ARE LAYED OUT AS IF YOU ARE STANDING ON THE RIGHT SIDE OF THE BIKE, FACING THE RIGHT SIDE COVER, I.E. COMPONENTS TOWARD THE FRONT OF THE BIKE WILL BE TO THE RIGHT ON THE PAGE.
2. GROUND - FOR CLARITY, GROUND WIRES ARE ONLY REFERENCED ON CIRCUIT DIAGRAMS. THE COMPLETE GROUND BUS IS CONTAINED ON SHEET 7.
3. WIRING - ONLY THE WIRING THAT IS PERTINENT TO THE SUBJECT CIRCUIT IS SHOWN. ALL OTHER WIRING IS SHOWN AS DASHED LINES WITH A REFERENCE TO THE SHEET WHERE THEIR RESPECTIVE CIRCUITS ARE DISPLAYED.
4. WIRING IDENTIFICATION - WIRING IS COLOR CODED, EITHER A SOLID COLOR, OR A SOLID COLOR WITH A TRACE OF A SECOND COLOR. "RED/LT GREEN" WOULD INDICATE A RED WIRE WITH A LIGHT GREEN TRACE.
5. CIRCUIT FOLLOWING - THE EASIEST WAY TO FOLLOW A PARTICULAR CIRCUIT IS TO START AT THE FUSE (GENERALLY TO THE LEFT SIDE OF THE PAGE), AND FOLLOW THE WIRING FROM IT TO THE VARIOUS SWITCHES AND DEVICES THAT IT FEEDS.
6. APPLICABILITY - ALL SHEETS ARE APPLICABLE TO ALL YEAR MODELS EXCEPT AS NOTED ON THE SHEET.
7. COMPONENT LOCATION - COMPONENTS WITHIN A COMMON AREA ARE ENCLOSED WITHIN A BOLD OUTLINE BOX. WHERE THIS IS NOT PRACTICAL, COMPONENT LOCATION IS INCLUDED NEAR THE COMPONENT IDENTIFIER.

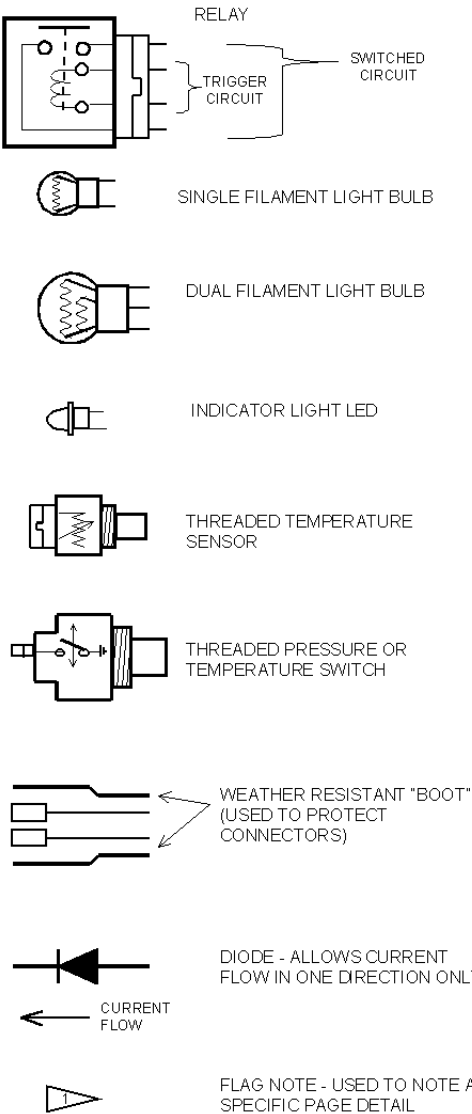


SYMBOLS:

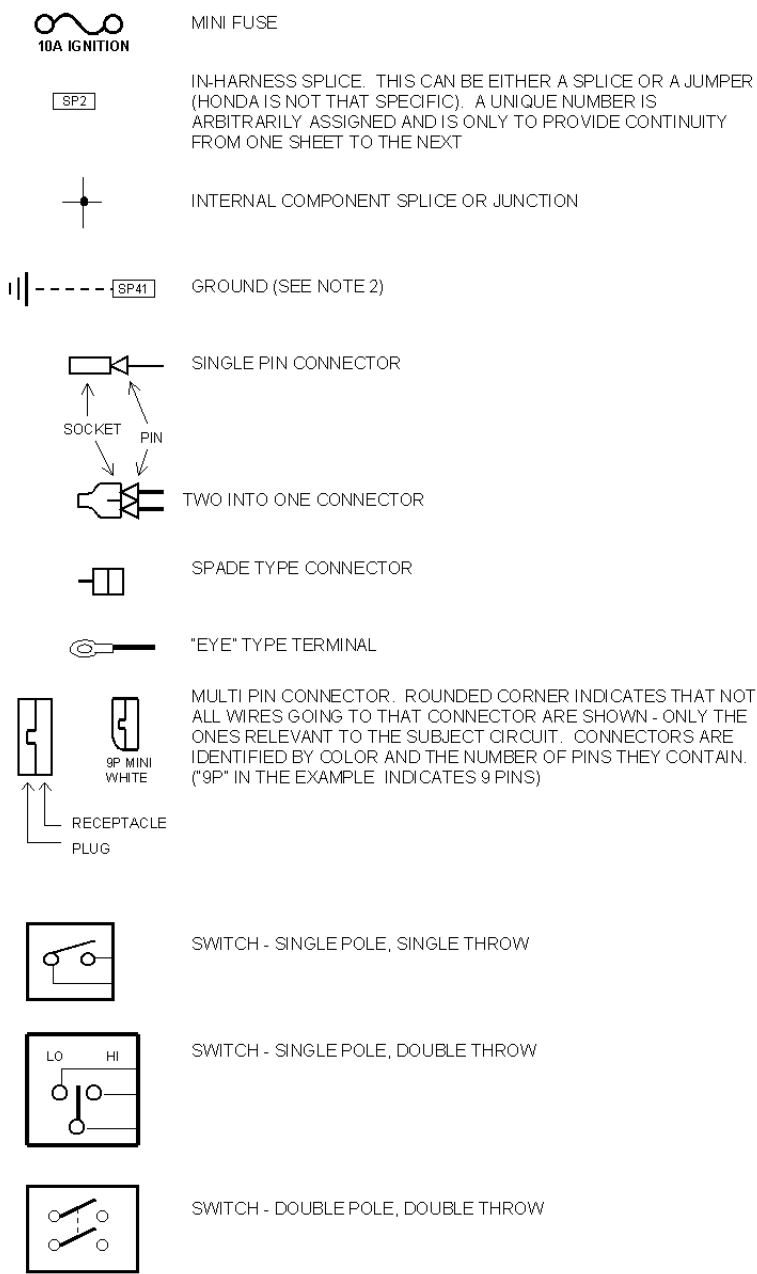

VALKYRIE WIRING DIAGRAM		
INTRO	NOTES & SYMBOLS	
INTERSTATE	REV: 3/11/02	RP BROWN

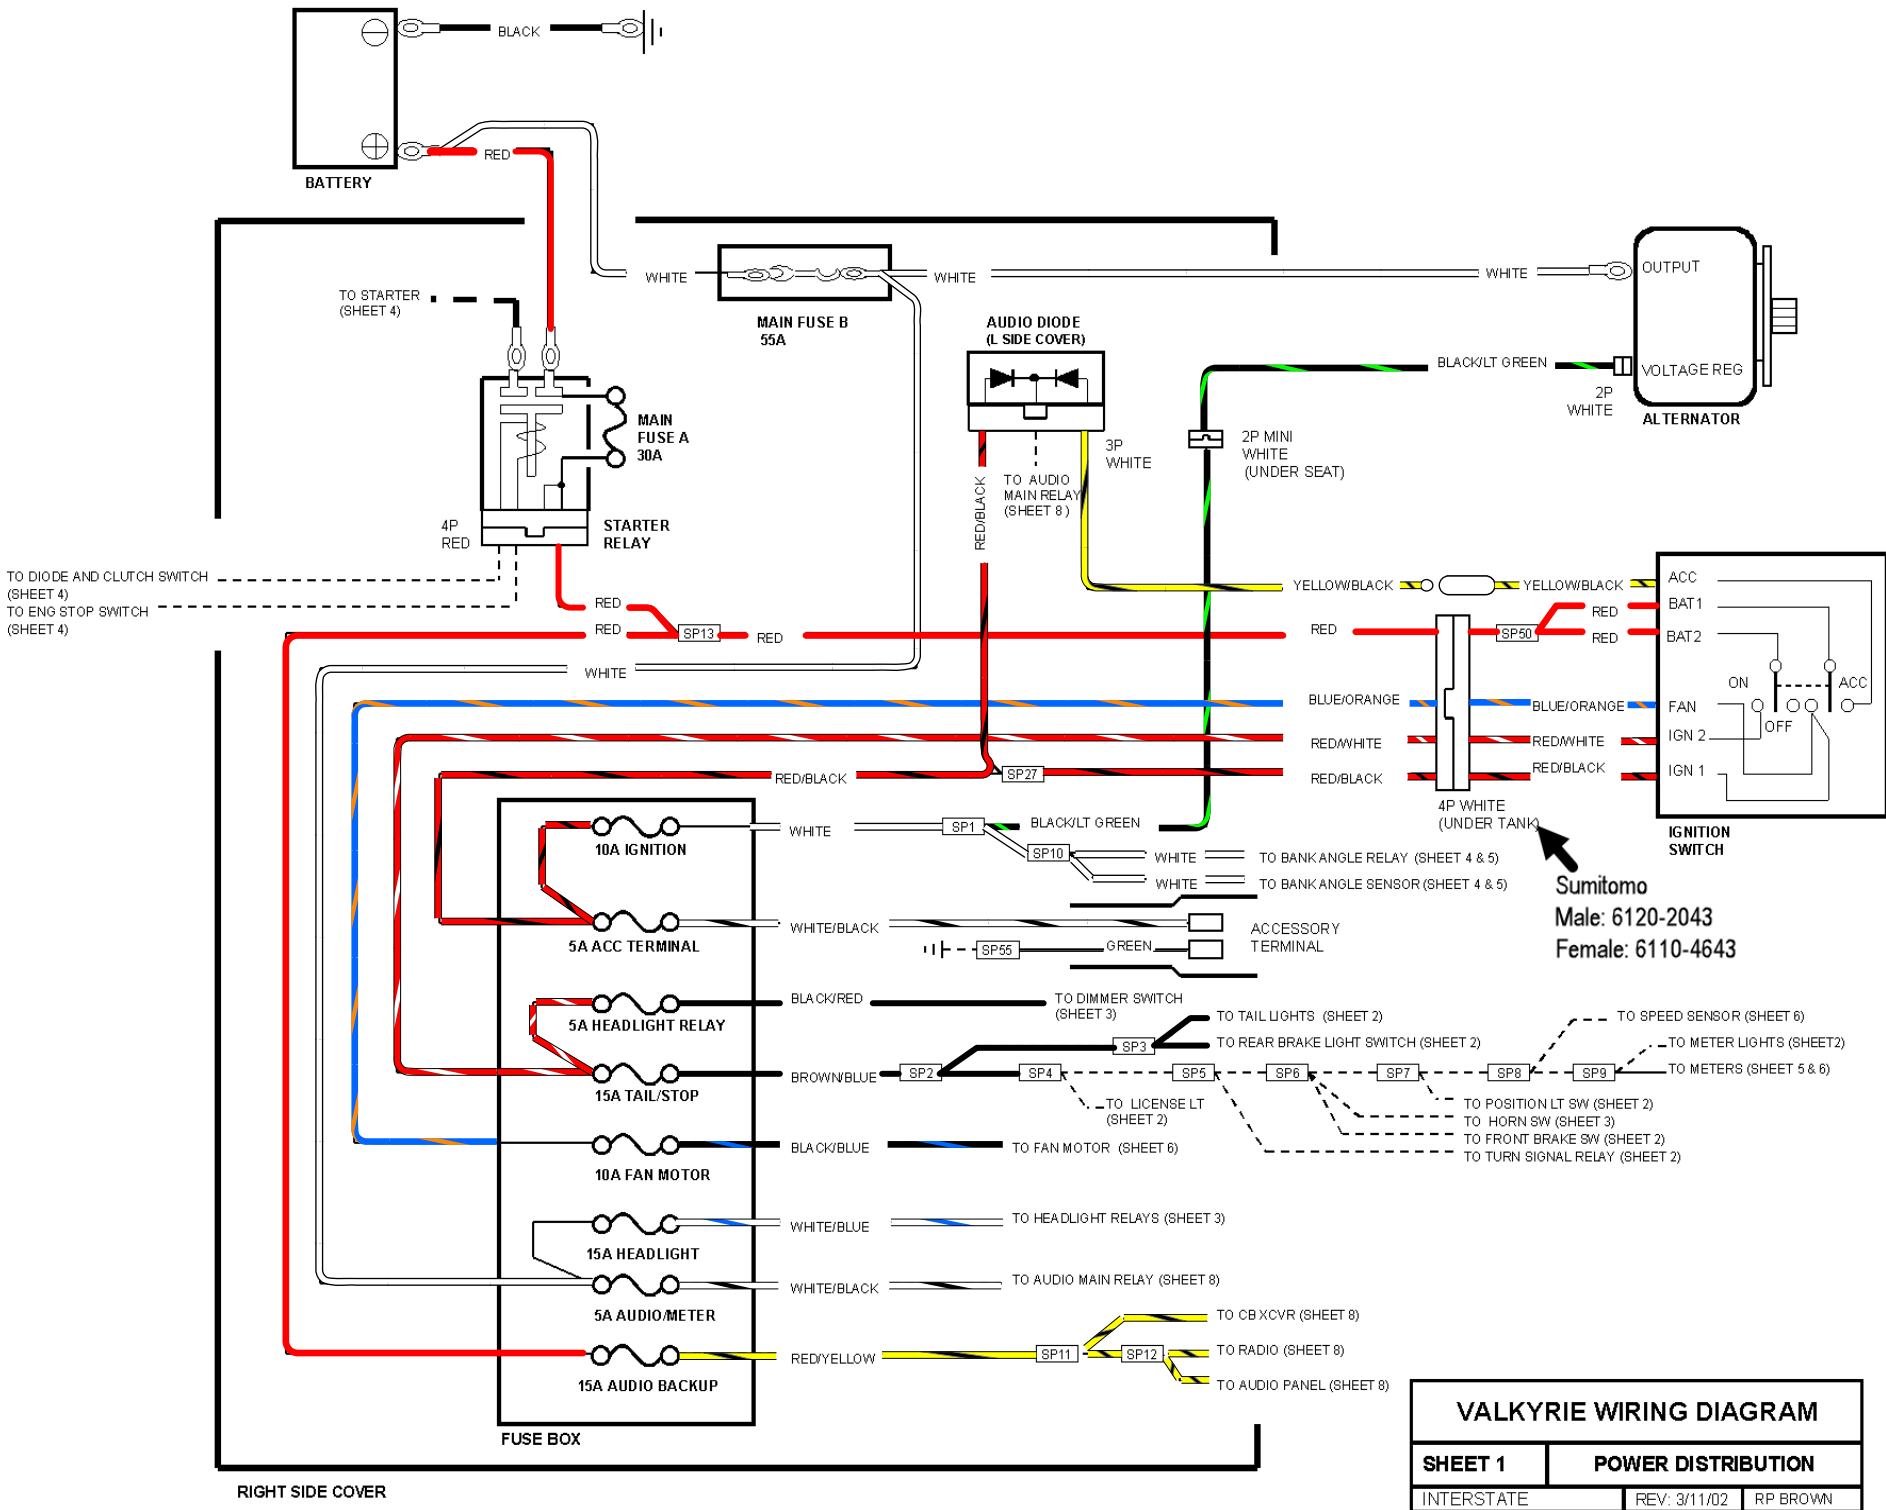

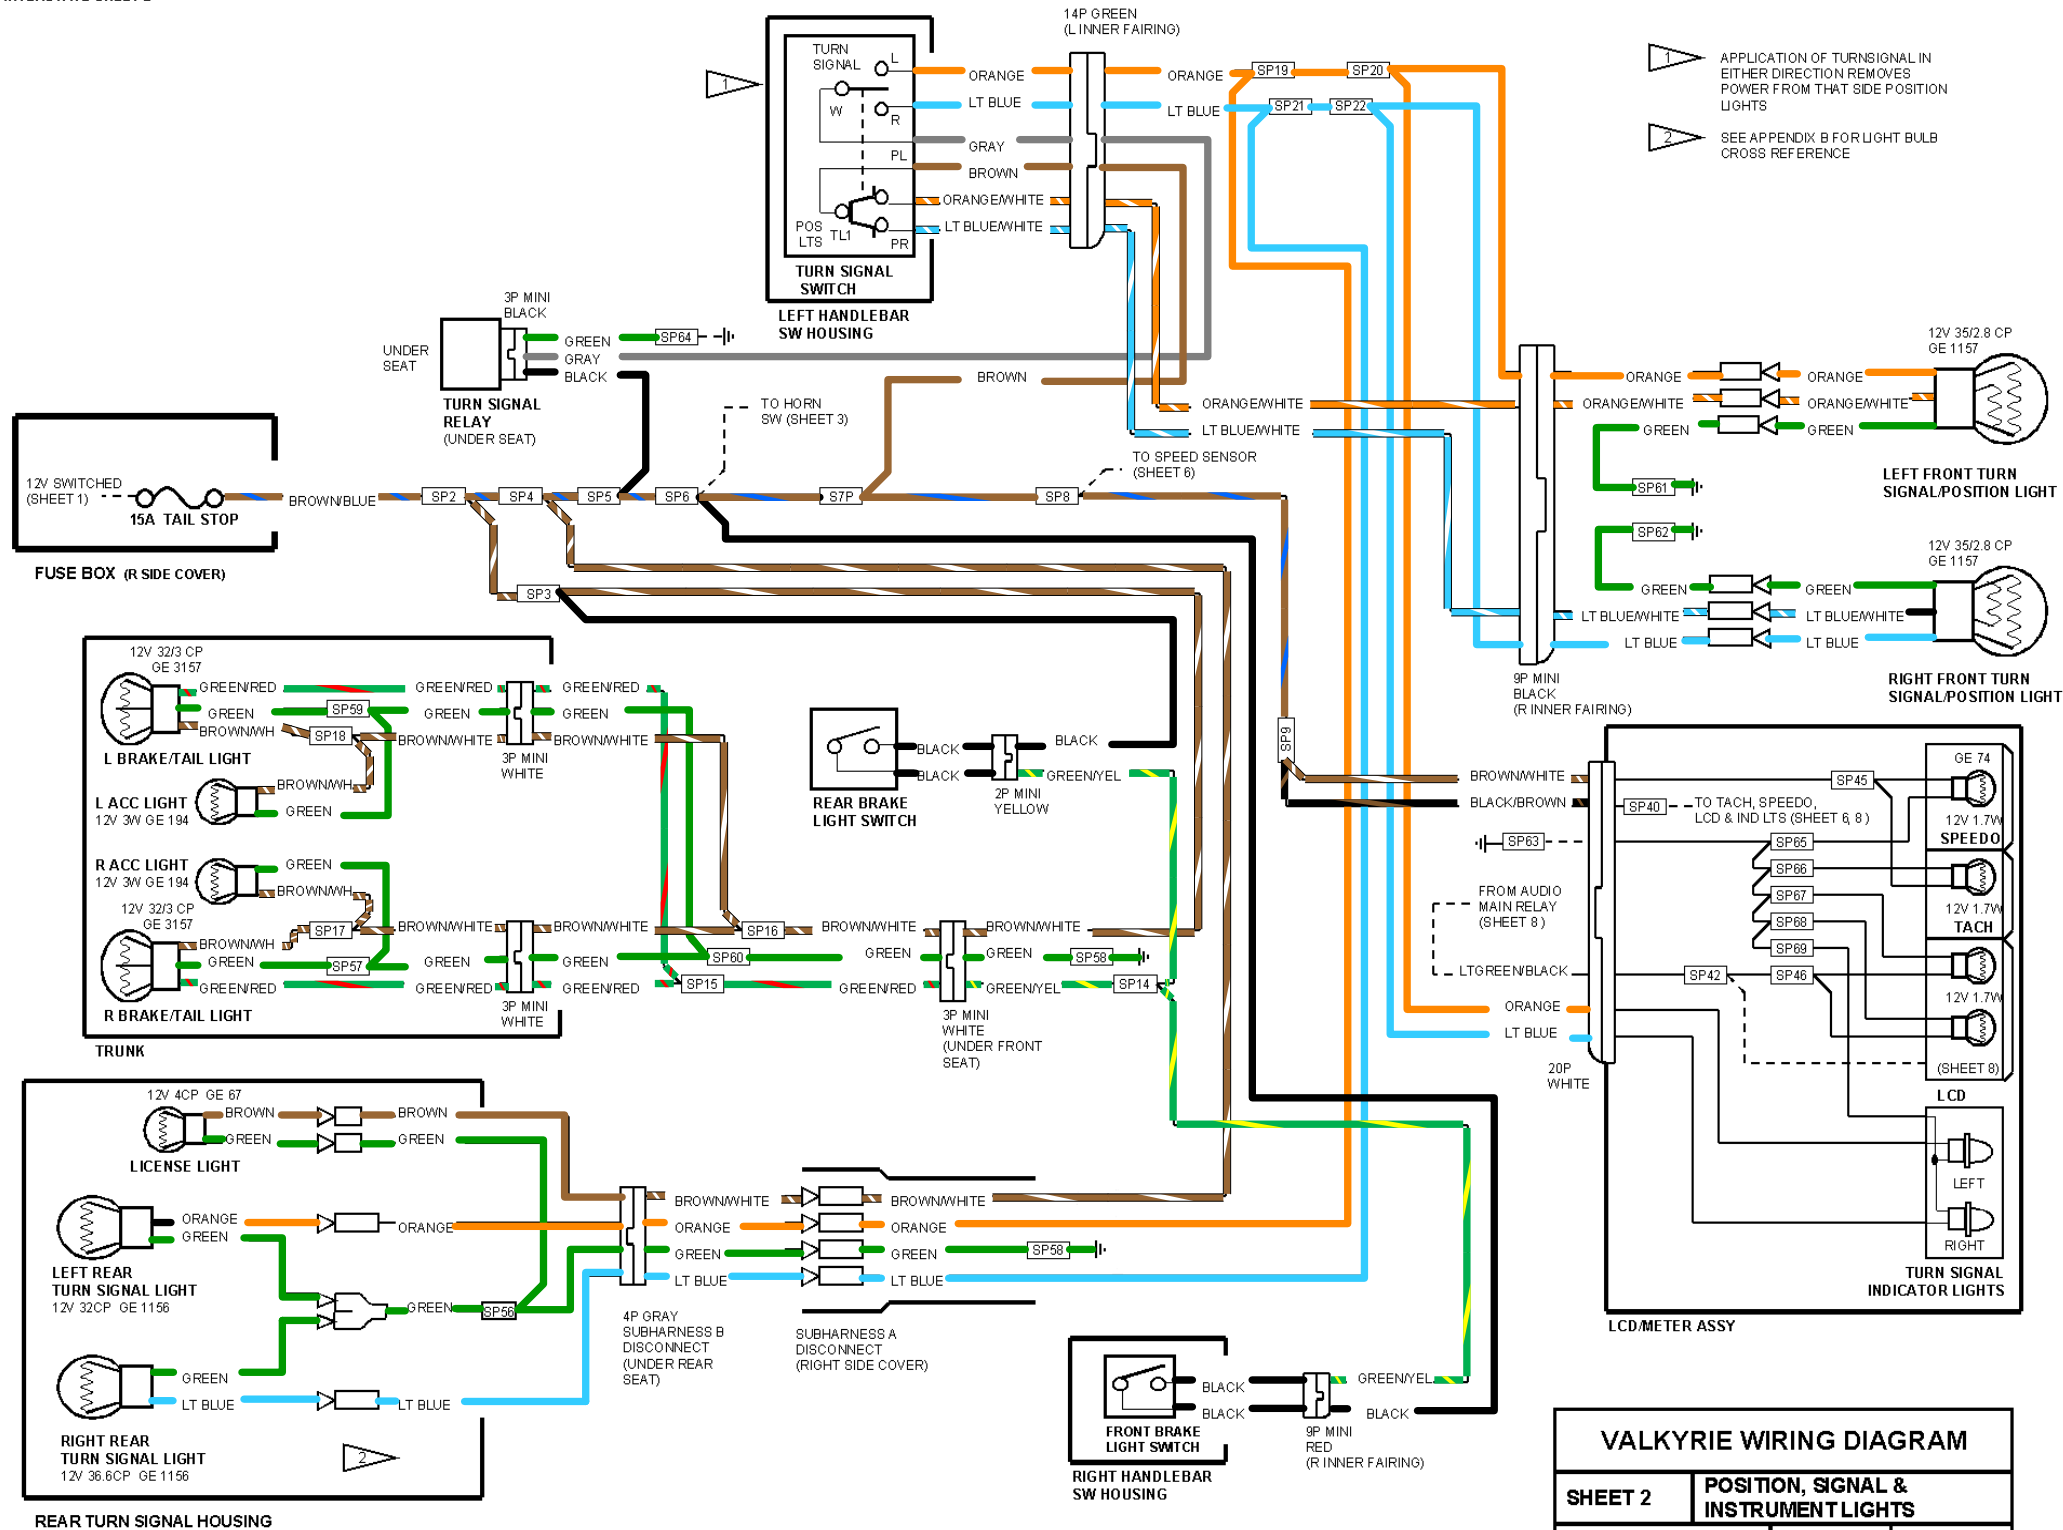



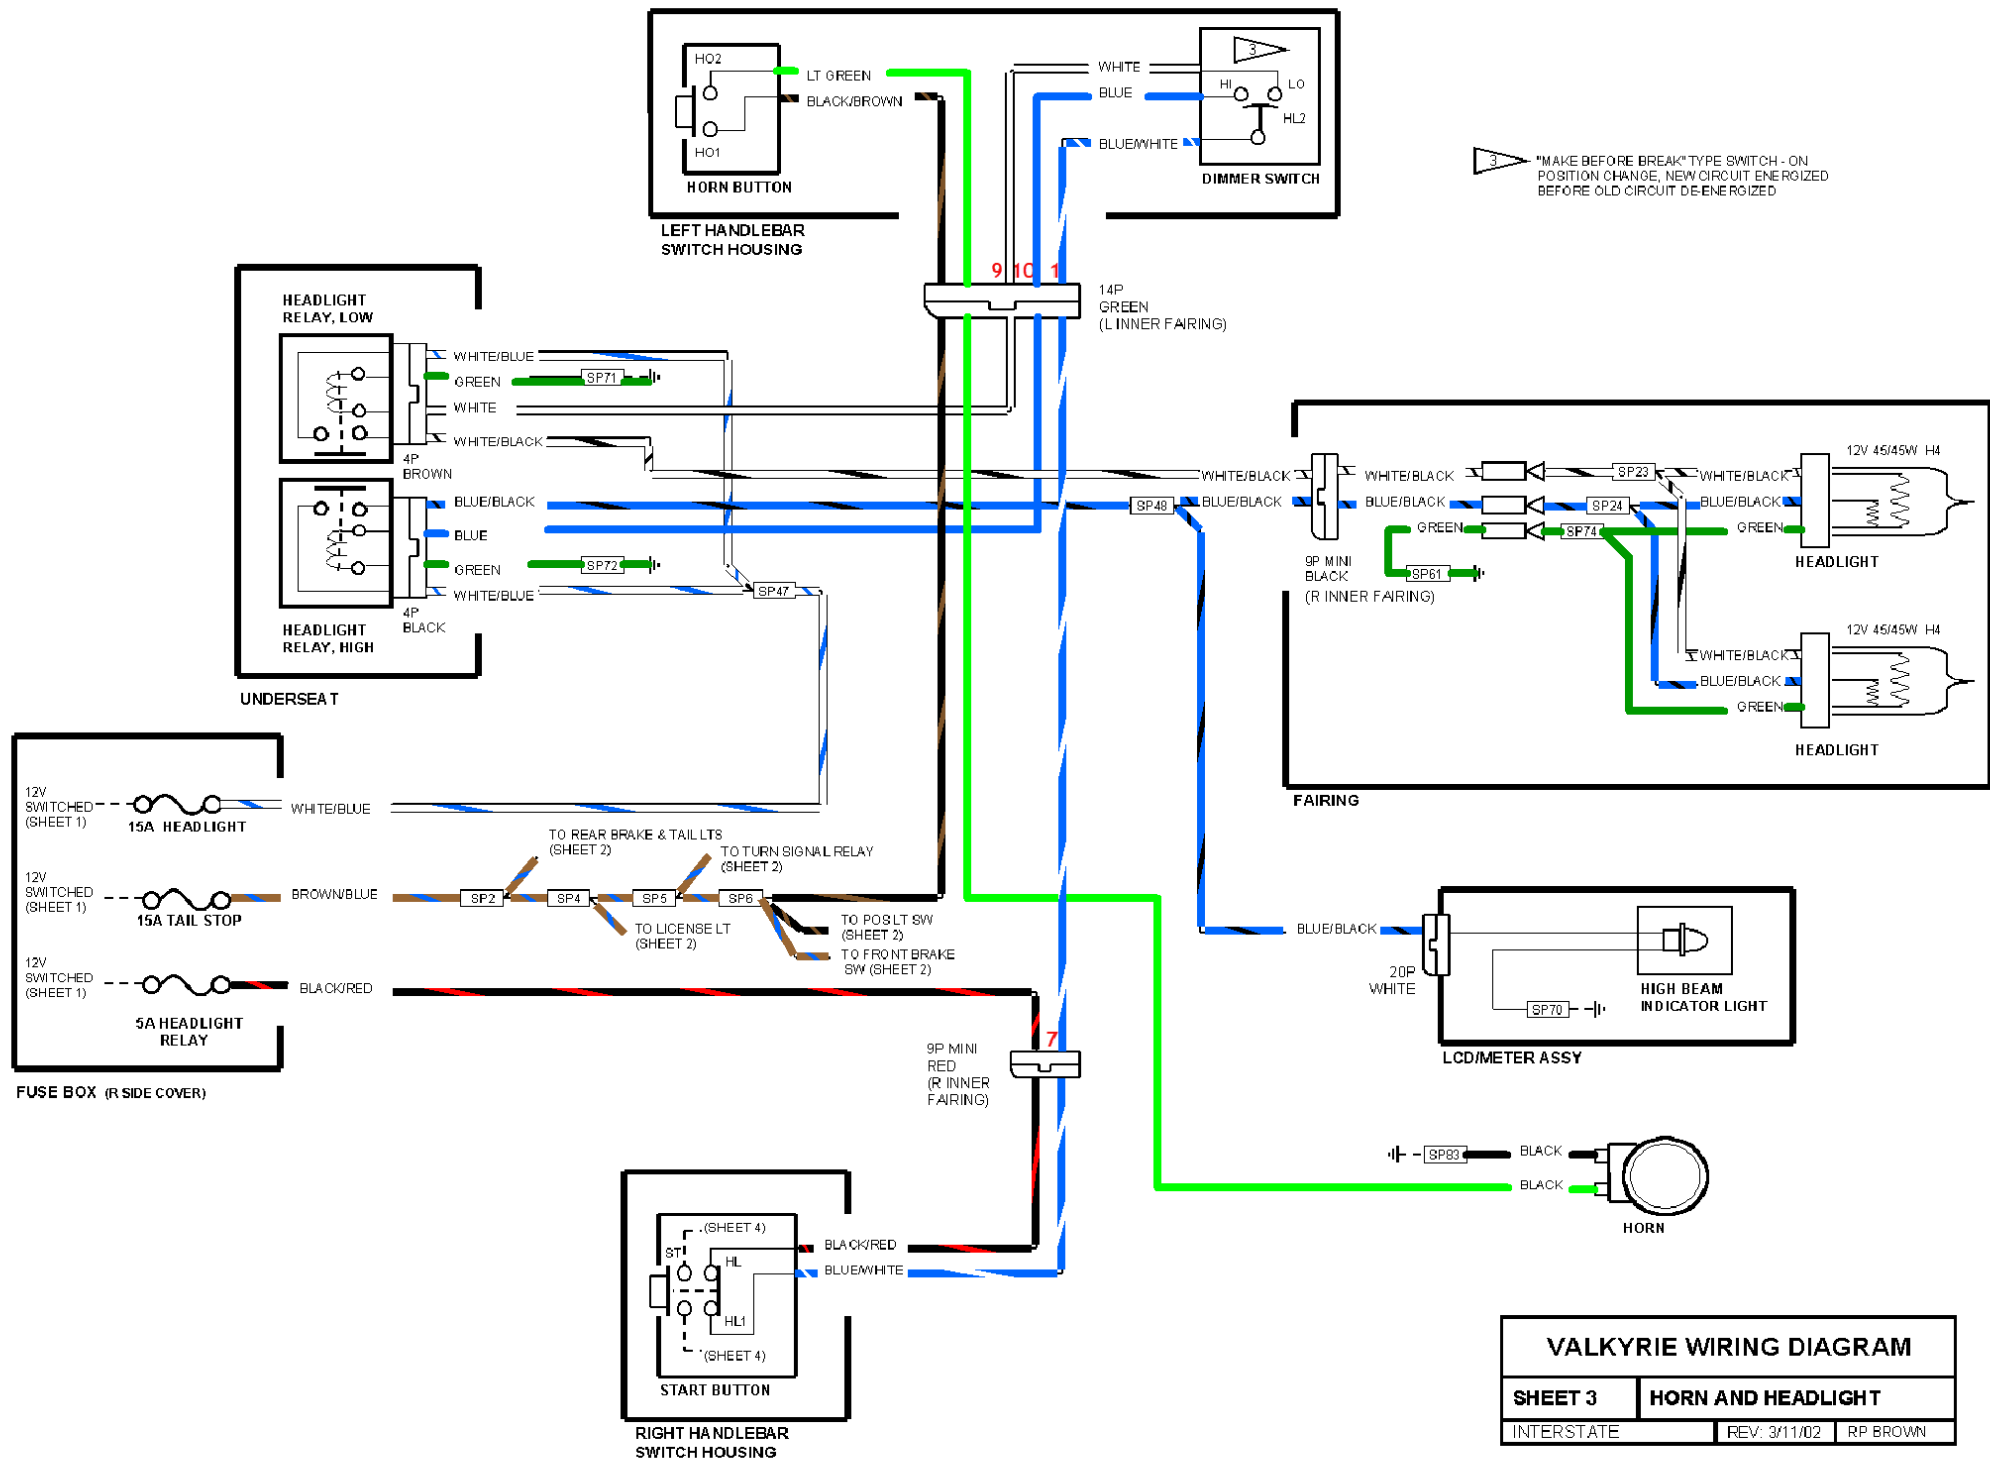


Diagram illustrating the Ignition Control Module (ICM) wiring connections:

- ICM Connections:**
 - 6: GREEN/WHITE
 - 11: LT GREEN/RED
- Wiring Labels:**
 - SIDE STAND SW
 - SHUT DOWN IGNITION IF NOT GROUNDED
 - NEUTRAL SW
- Connector Labels:**
 - 16P BLACK
- Location:** UNDER SEAT

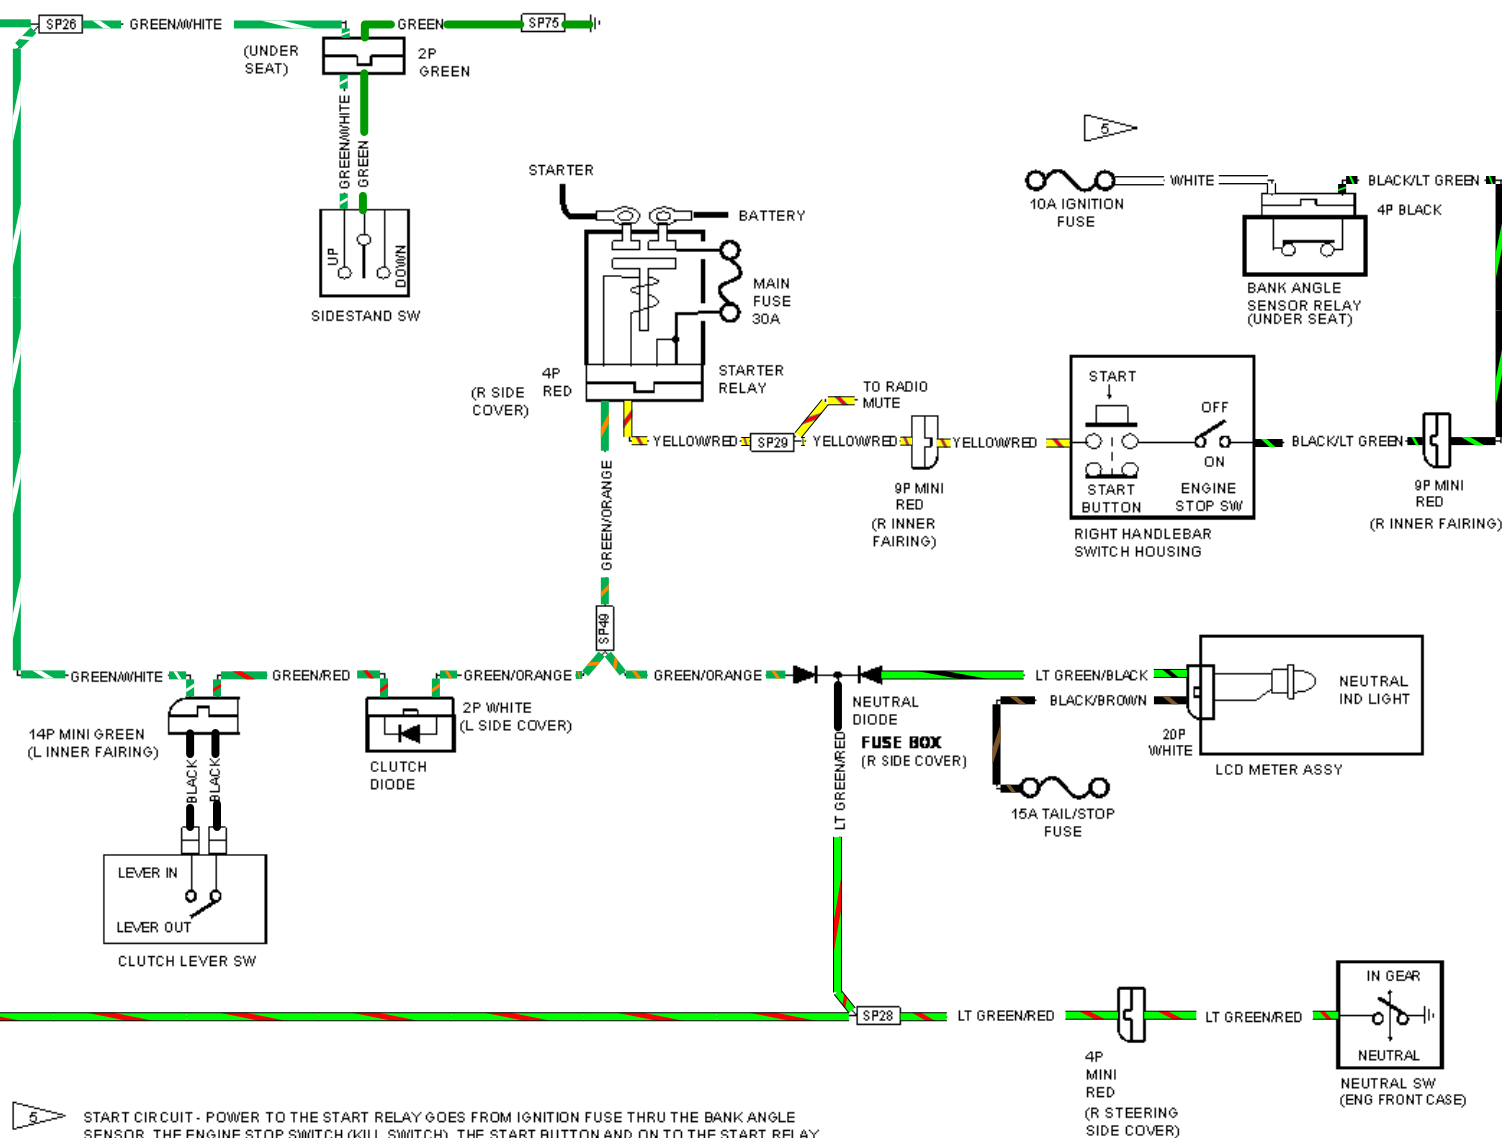

 **RUN CIRCUIT -** FOR ICM MODULE TO BE "ON" (I.E. ENGINE TO RUN), ICM MUST SEE A GROUND ON PIN 6 AND/OR PIN 11. PIN 11 SEES A GROUND THRU THE NEUTRAL SWITCH WHEN THE TRANNY IS IN NEUTRAL. PIN 6 SEES A GROUND THRU THE SIDESTAND SWITCH WHEN THE SIDESTAND IS UP.

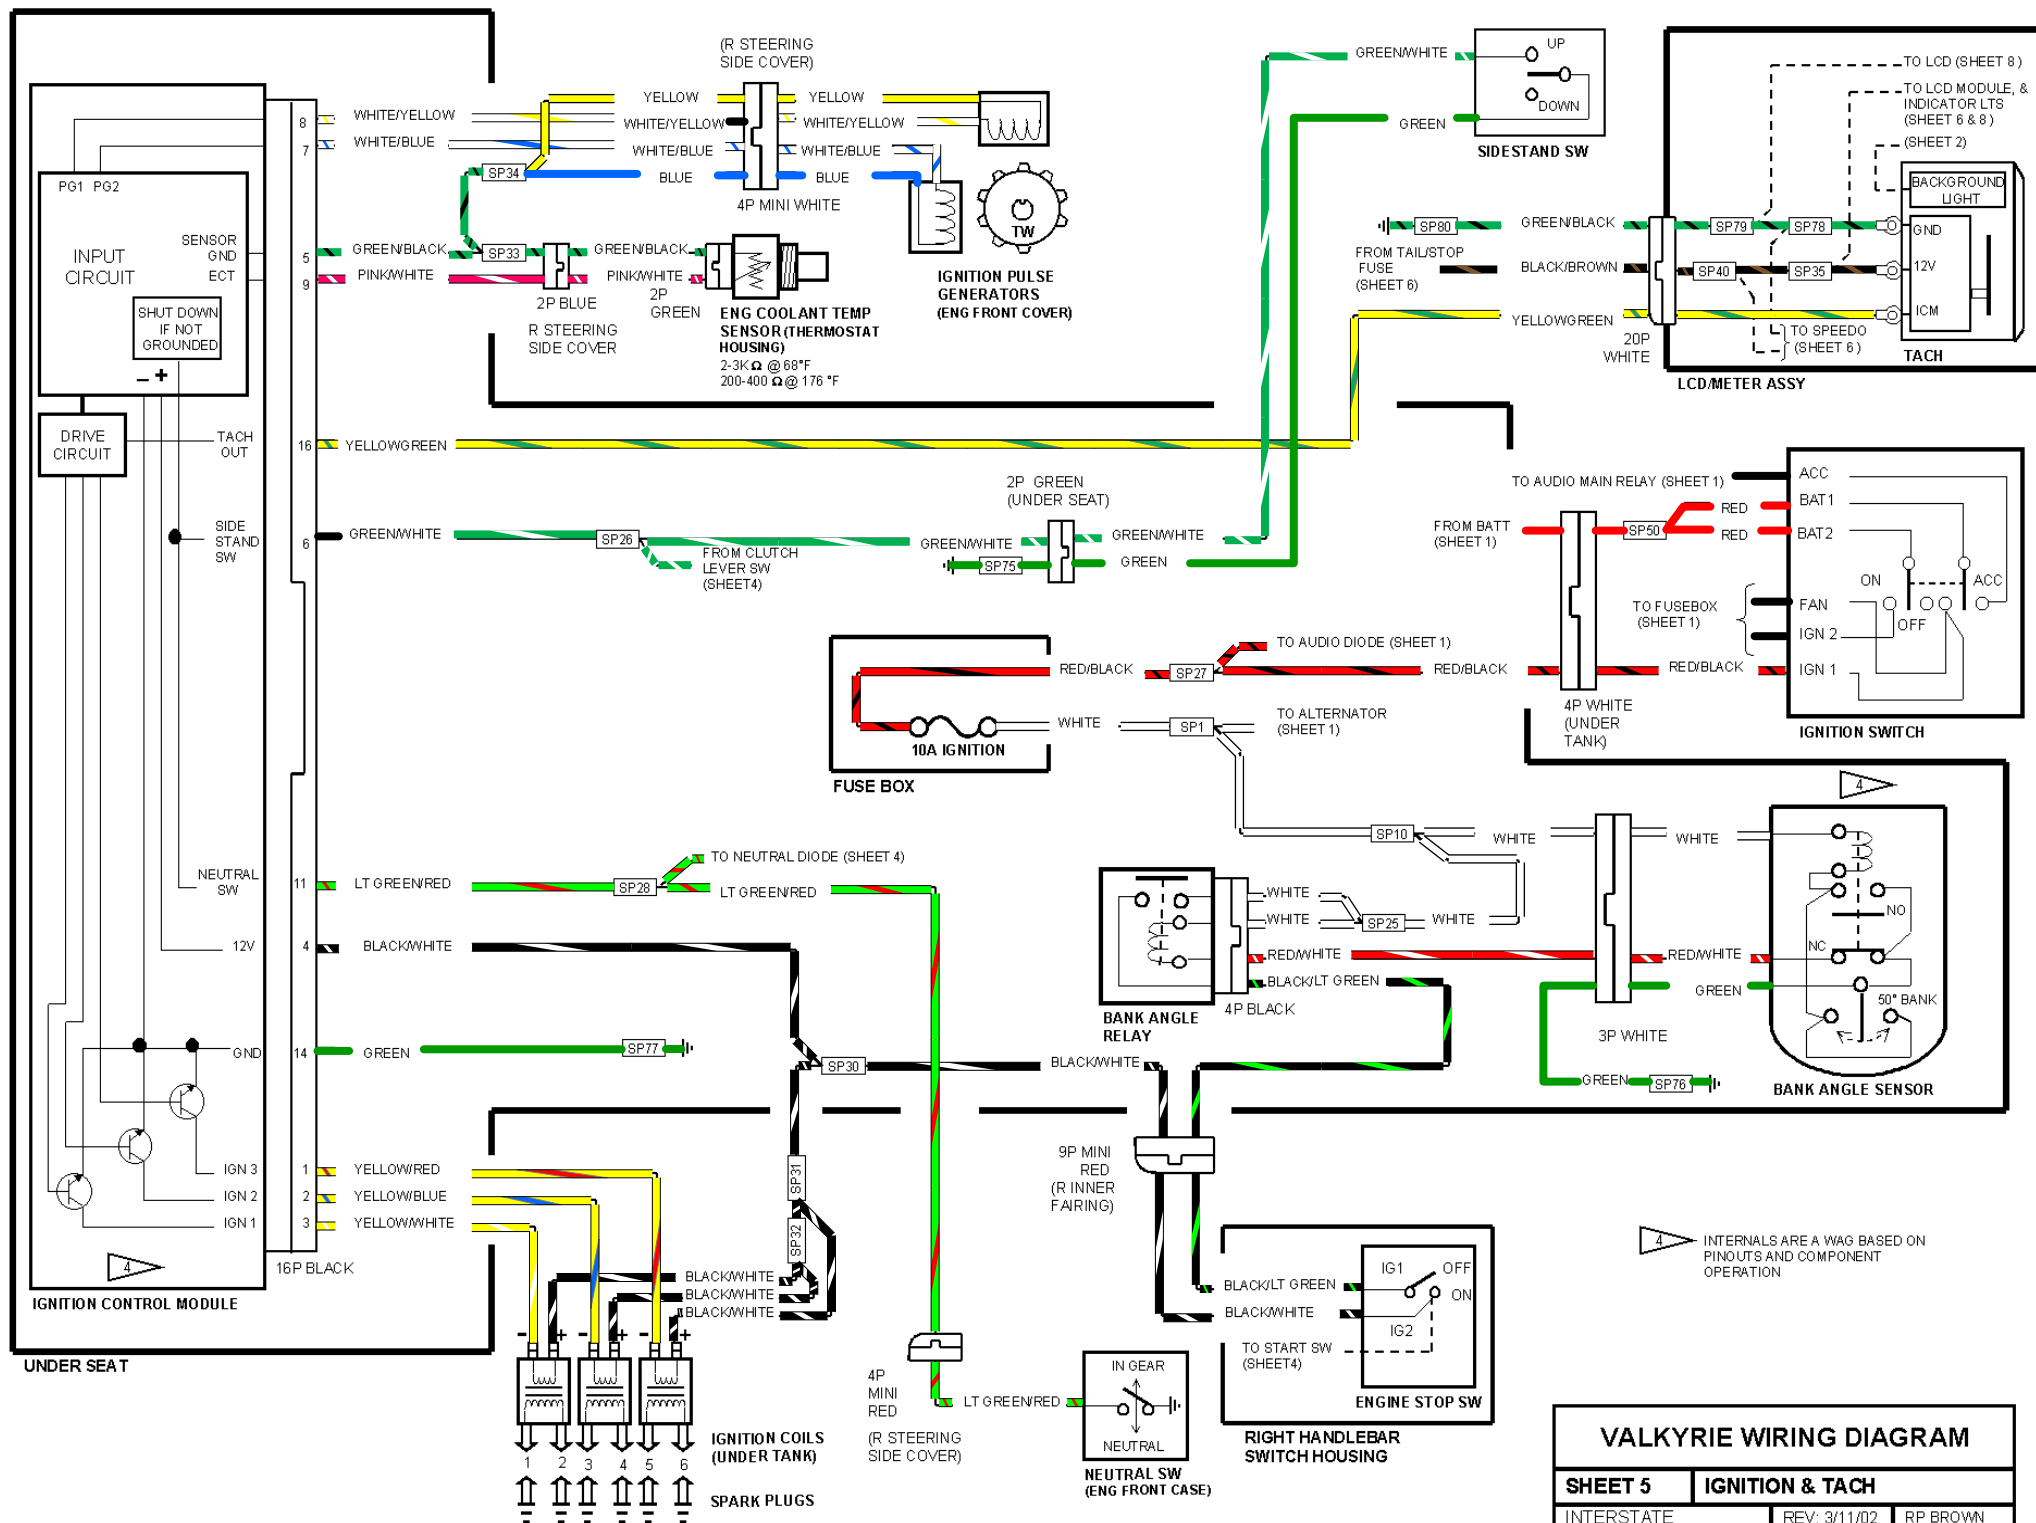


VALKYRIE WIRING DIAGRAM


SHEET 5 IGNITION & TACH

INTERSTATE


REV: 3/11/02


RP BROWN

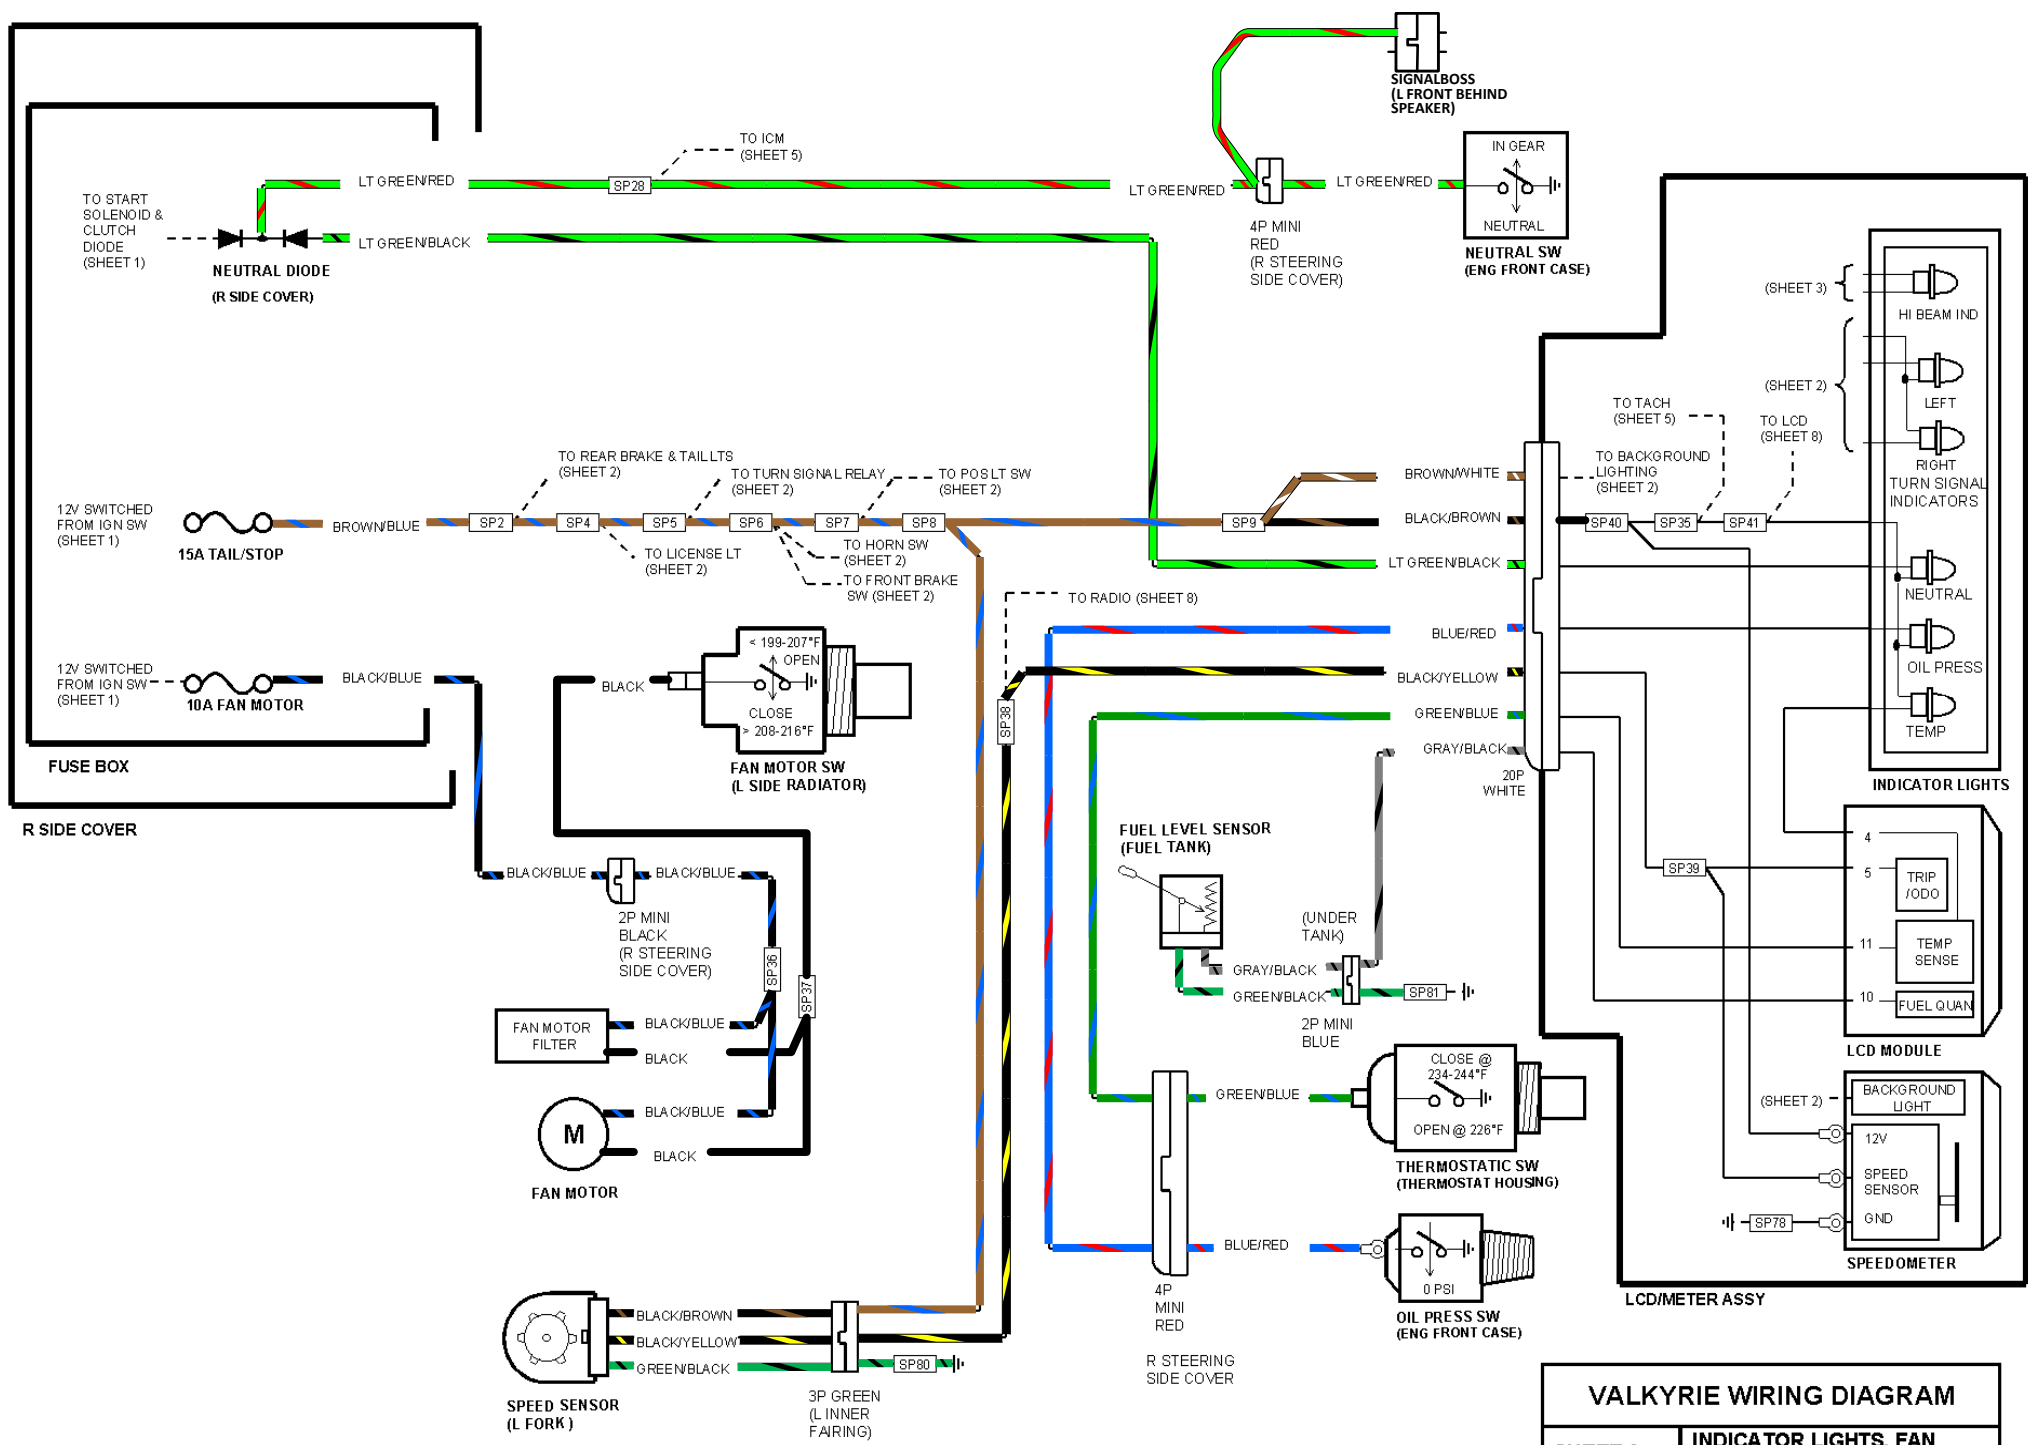


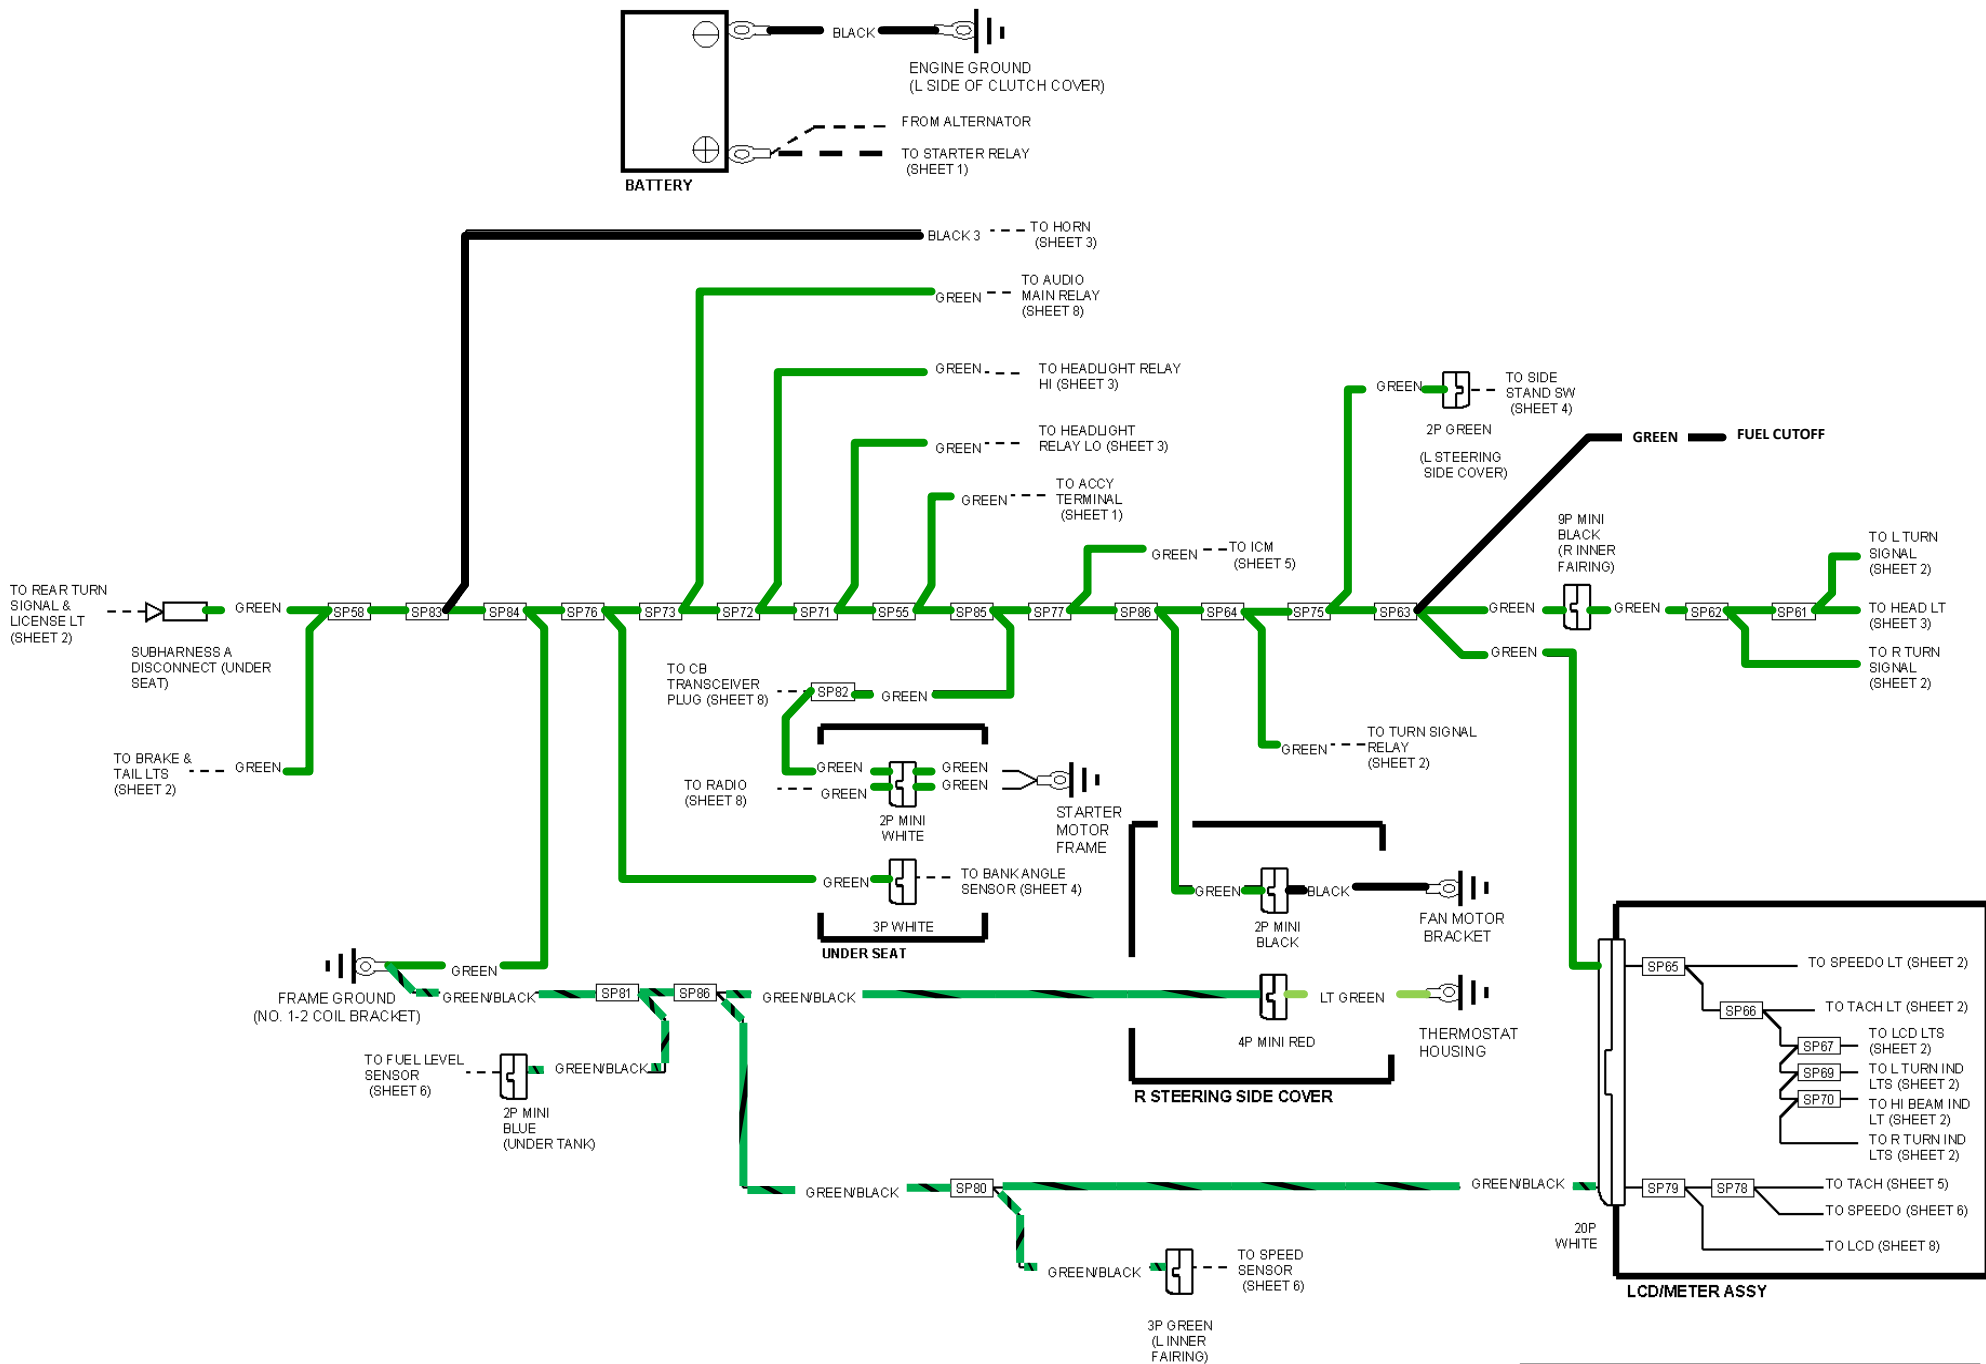

VALKYRIE WIRING DIAGRAM		
SHEET 7	GROUND BUS	
INTERSTATE	REV: 3/11/02	RP BROWN

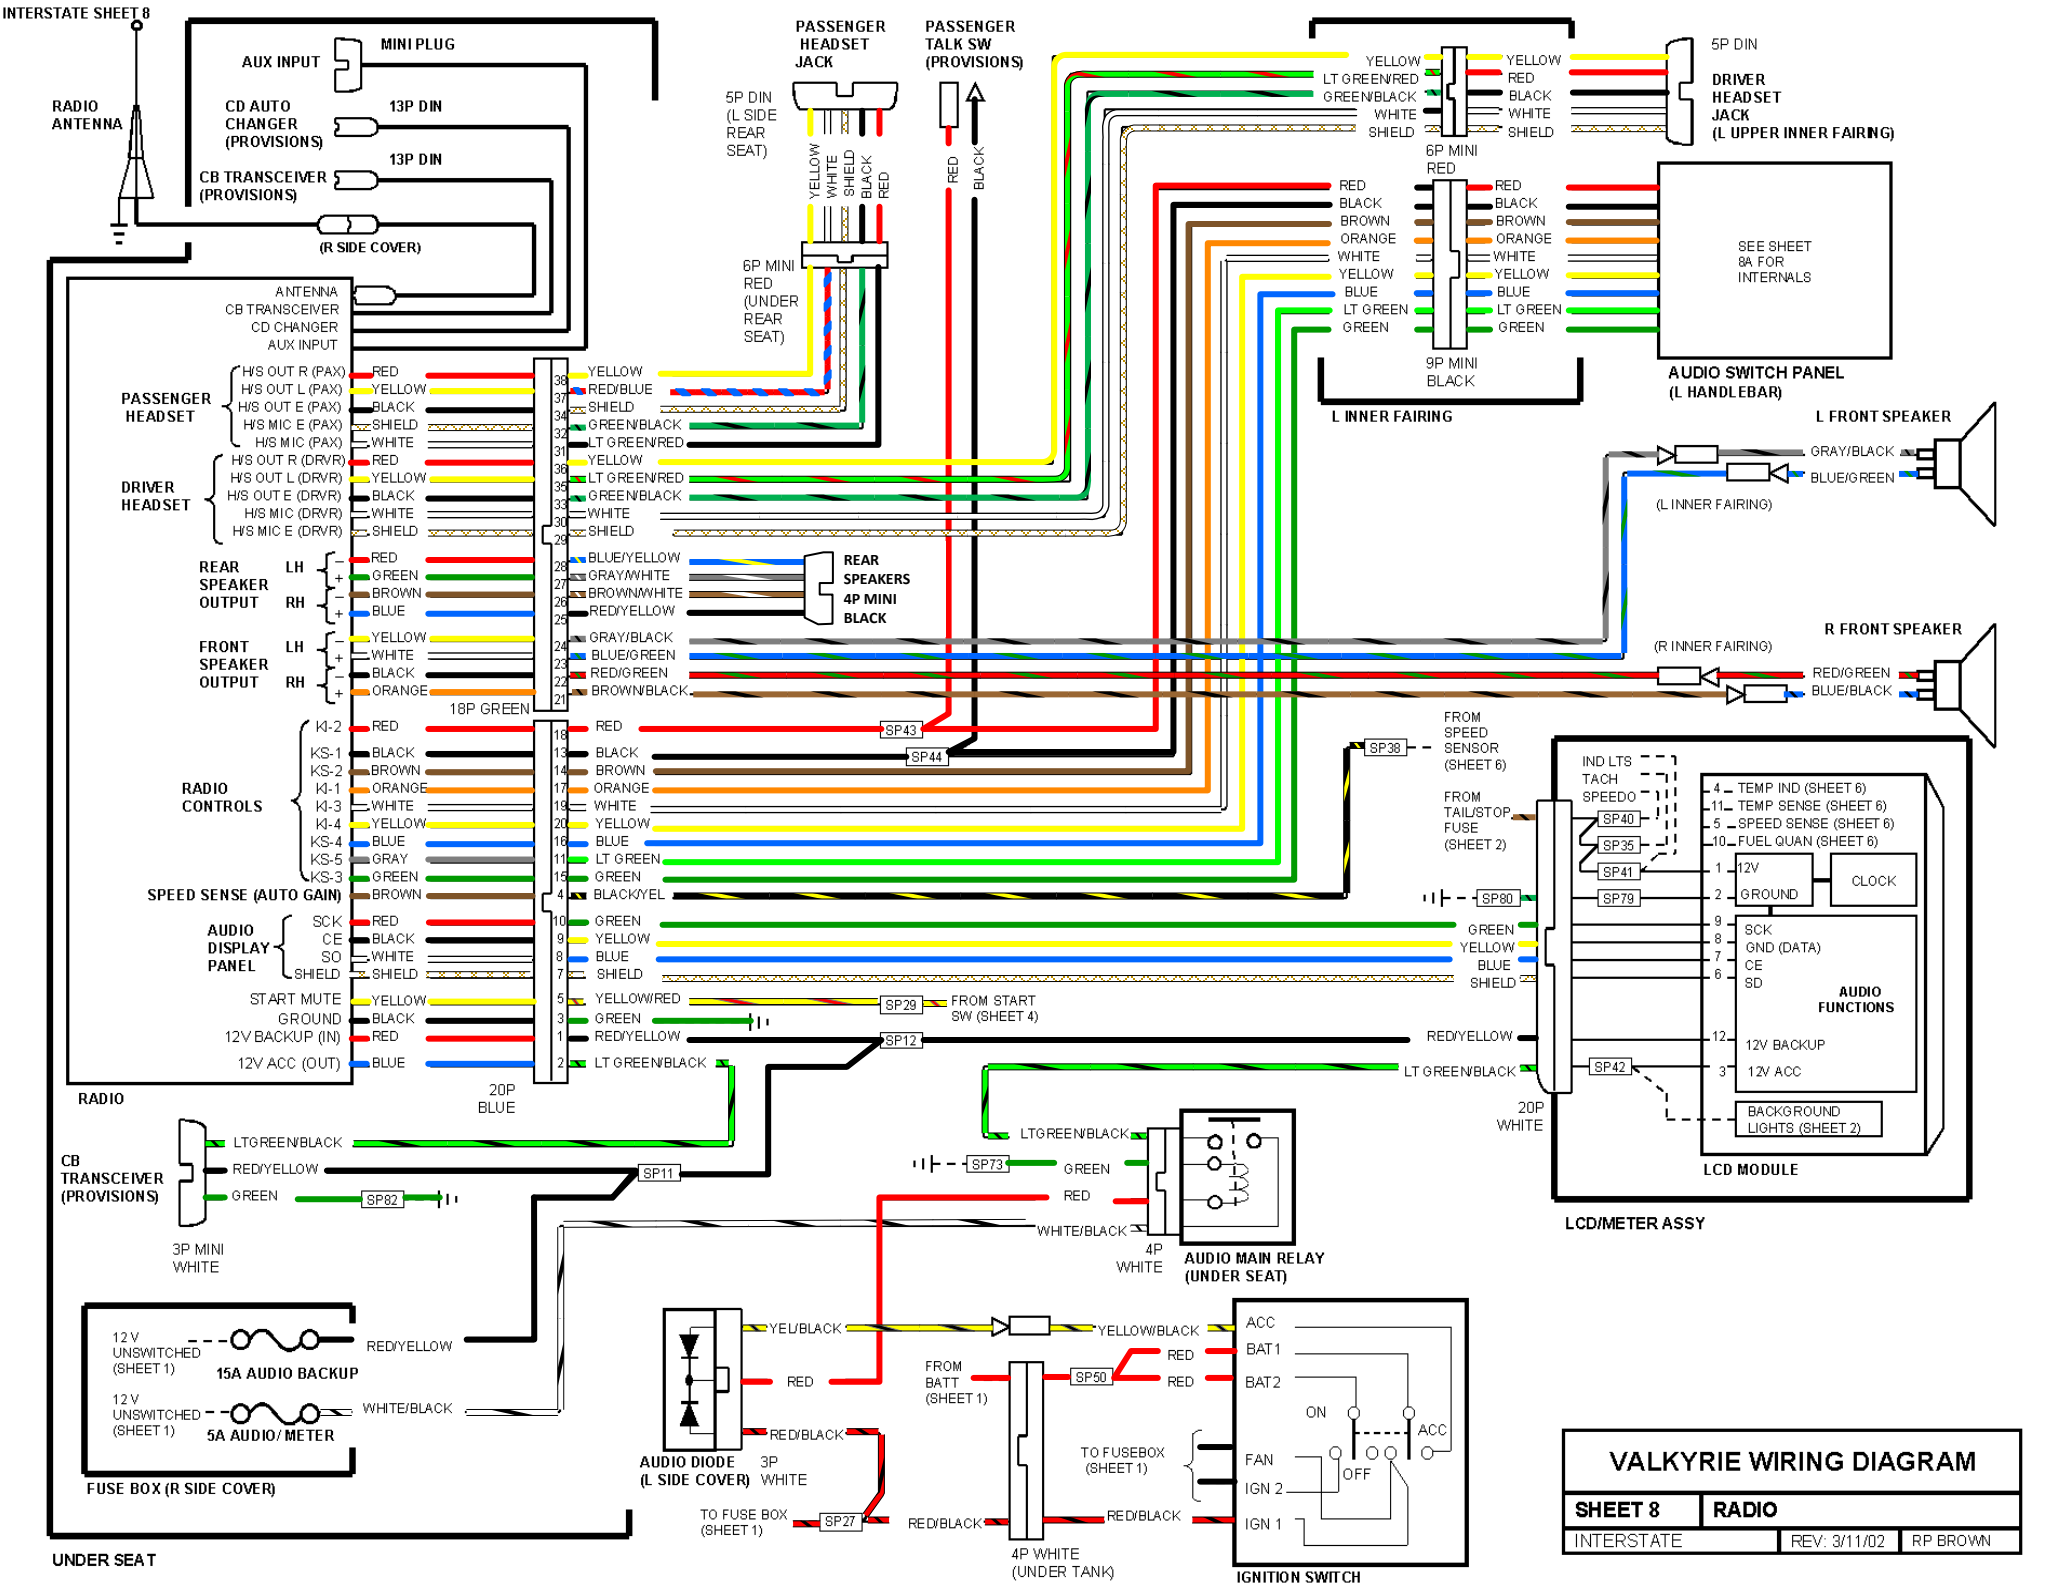

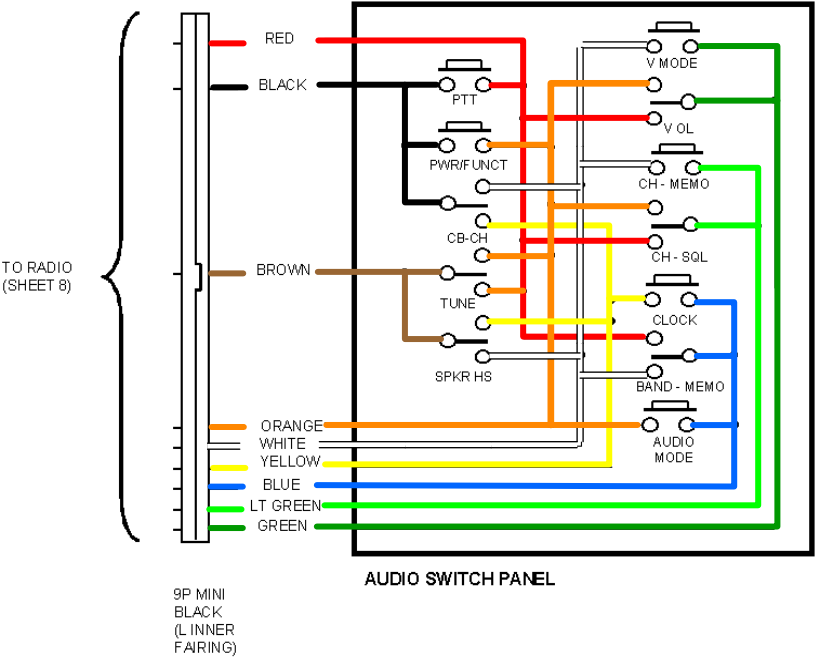

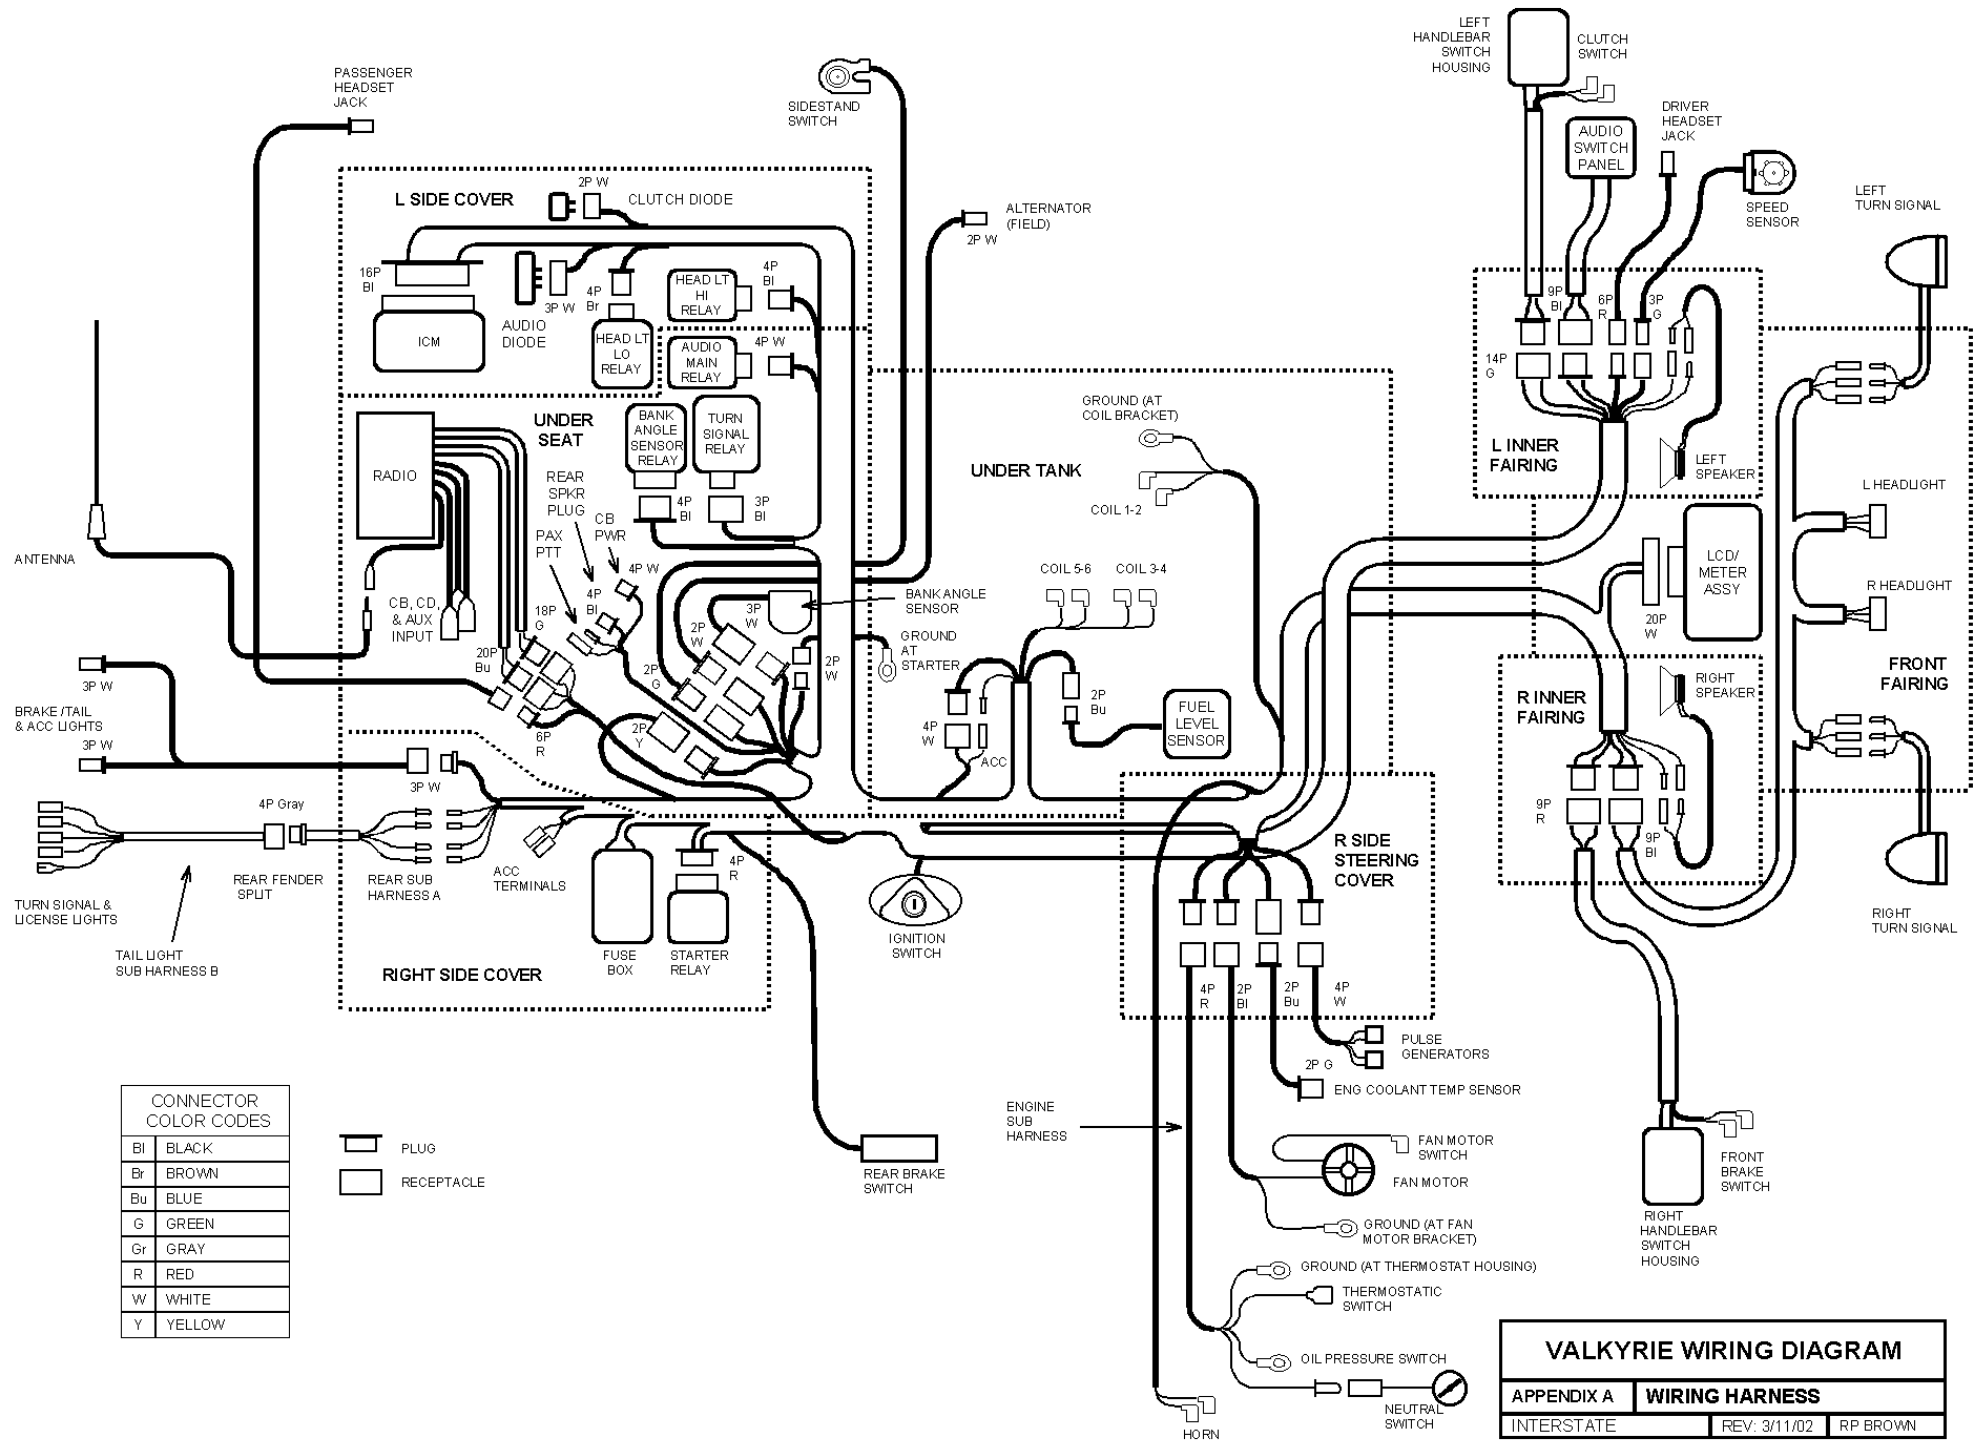

VALKYRIE LIGHT BULB CROSS REFERENCE

Application	Effectivity ¹		Stock Spec/Quan	Honda P/N	Bulb, Base	Replacement Bulbs	Volts	Amps	Watts	MSCP ²	Avg Life Hrs	MOL ³
Headlight		CT	12V60/55W	34901-MC7-601	T-5, P43T-38	H4, 9003, HB2	12.8	4.7/4.3	60/55			
	C	CT	12V60/55W	34901-MC7-601AH								
		CF	12V 45/45 W X 2	34901-MS2-671	T-5, P43T-38	H4, 9003 ⁴	12.8	3.5/3.5	45/45			
Brake/Tail Light	C	CT	12V 32/3 CP (12V 23/8W)	34905-425-671	S-8, D.C. Index	1157	12.8/14	2.1/1.59	26.8/8.3	32/3	1200/5000	2.00
						2357	12.8/14	2.23/1.59	28.54/8.26	40/3	400/5000	2.00
		CF	12V 21/5 W ECE X 2	34906-MBB-611	S-8, Plastic Wedge	3157	12.8/14	2.1/1.59	26.8/8.3	32/3	1200/5000	2.13
License Light						3357	12.8/14	2.23/1.59	28.54/8.26	40/3	400/5000	2.13
		CT	CF 12V 4 CP	34902-500-003	G-6, S.C. Bayonet	67	13.5	0.59	8	4	5000	1.44
		CT	CF 12V 4 CP	34908-272-000								
	C	CT	CF 12V 4 CP	34909-505-610								
		CT	CF 12V 8W	34616-568-671								
		CT	CF 12V 4CP 8W (67)	34909-505-003								
Front Turn/Running Light	C	CT	12V 32/3 CP X 2 (12V 23/8W)	34905-425-671	S-8, D.C. Index	1157	12.8	2.1/1.59	26.9/7.5	32/3	1200/1500	2.00
		98-00C, 00CT, CF	12V 35/2.8 CP X 2 (12V 21/5W)	34906-447-711								
Rear Turn Signal	C	CT	12V 32 CP X 2 (12V 23W)	34905-268-671	S-8, S.C. Bayonet	1156	12.8	2.1	26.9	32	1200	2.00
		00CF										
	C	00CT	12V 36.6 CP X 2 (12V 21W)	34908-634-611								
Tach & Speedo Lt	C	CT	12V 1.7 W	34908-MB9-871	T-3 1/4, Wedge	161	14.0	0.19	2.7	1	4000	1.06
		98CT	T10 (mm)	34908-MZ0-760		158	14.0	0.24	3.4	2	500	1.06
			CF 12V 1.7 W	34908-MG9-951	T-1 3/4, Mini Wedge	74	14.0	0.10	1.4	1	500	0.80
						70	14.0	0.15	2.1	2	1000	0.80
LCD Module Lt			CF 12V 1.7 W	94908-MG9-951	T-1 3/4, Mini Wedge	74	14.0	0.10	1.4	1	500	0.80
						70	14.0	0.15	2.1	2	1000	0.80
Hi Beam, Neutral, & Turn Signal Ind	C	CT	12V 3 W	34908-KM1-671	T-3 1/4, Wedge	161	14.0	0.19	2.7	1	4000	1.06
						158	14.0	0.24	3.4	2	500	1.06
Trunk Accy Lights			CF 12V 3W X 2	34908-MB0-003	T-3 1/4, Wedge	158	14.0	0.24	3.4	2	500	1.06
						194	14.0	0.27	3.8	2	2500	1.06
						168	14.0	0.35	4.9	3	1500	1.06

¹ C = Standard; CT = Tourer; CF = Interstate (All year models except as shown)

² Mean spherical candle power

³ Mean overall length (inches)

⁴ Stock Honda bulb is proprietary - H4 replacement may require shim

VALKYRIE WIRING DIAGRAM

APPENDIX B LIGHT BULB CROSS REF

INTERSTATE REV: 3/11/02 RP BROWN