



2. Remove the brackets from the frame.
3. Install the sub saddle bag pipe on the holders of the frame.

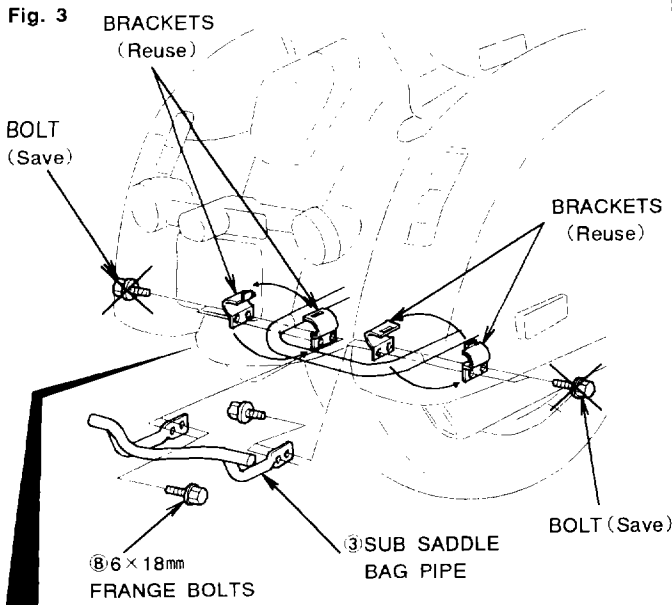


LUG OF BRACKET
Insert the lug in this hole.



3. Temporarily install the right saddle bag pipe.
4. Temporarily install the left saddle bag pipe.

Fig. 4

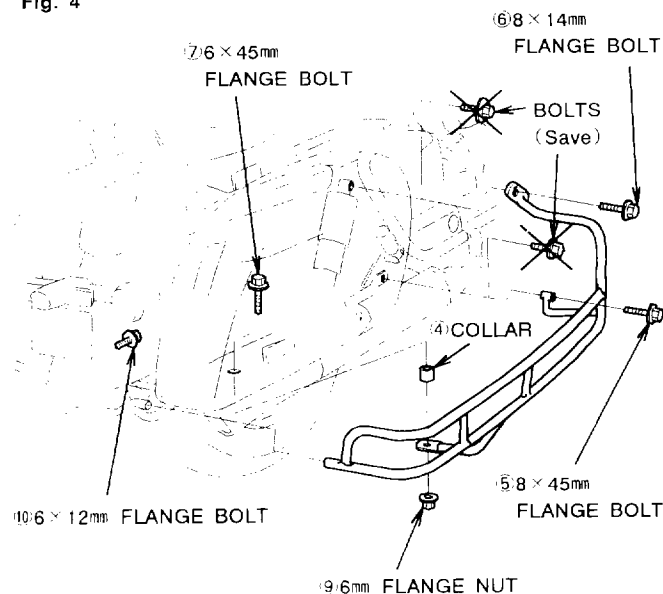

5. Tighten all bolts and nuts to the specified torques.
6. Reinstall the seat.

5 USE AND CARE

- Do not use the saddle bag pipes to carry other accessories or cargos.
- Do not attach tie-downs or ropes to the saddle bag pipes when transporting the motorcycle on a trailer or truck bed.
- Be extremely careful not to damage the motorcycle and other accessories with the saddle bag pipes when installing them.
- Handle the saddle bag pipes with care. They are cosmetic parts and are not designed to protect the saddle bags.
- Check the saddle bag pipes for security from time to time and retighten them if necessary.
- Be sure to check the motorcycle and accessories for damage and replace all damaged parts with new ones when the motorcycle tipped over.

READ THE OWNER'S MANUAL CAREFULLY.
The Owner's Manual has additional safety and operational information.