

INSTALLATION INSTRUCTIONS

Accessory
EXHAUST PIPE FINISHER
 P/N 08F53-MZ0-100

Application
GL1500C

Publications No.
 MII7254 (9603)


Issue Date
 March, 1996

Accessory Weight : 5.1 lbs (2.3kg)

READ THESE INSTRUCTIONS CAREFULLY.

1 PARTS LIST

Fig. 1

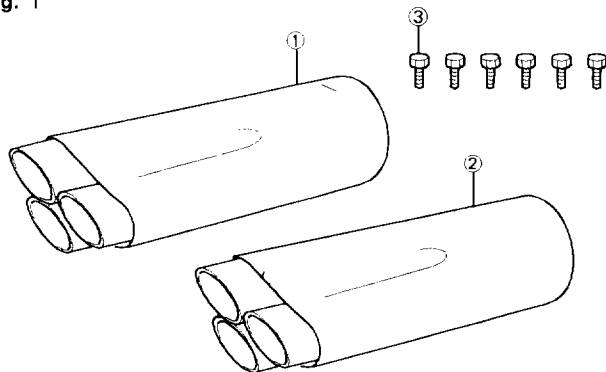

No.	Description	Q'ty	Part No.
①	Right exhaust pipe finisher	1	08F53-MZ0-100-01
②	Left exhaust pipe finisher	1	08F53-MZ0-100-02
③	6×12mm Bolt	6	08F53-MZ0-100-03

2 TOOL REQUIRED

- 8mm Combination wrench
- 10mm Combination wrench

3 RECAUTIONS

- To prevent scalding, do not install the finishers when the engine and exhaust system are hot.


TORQUE CHART

Item	N · m	kgf-m	ft-lbs
6mm Flange bolt	12	1.2	9

4 INSTALLATION

1. Remove 3bolts, lockwashers and washers and one of the original finisher. Keep the lockwashers (3) and washers (3). Do this for both side.
2. Install one new finisher using 3 6×12mm bolts, 3 lockwashers and 3 washers. Do this for both side. Torque all 6 bolts.

Fig. 2

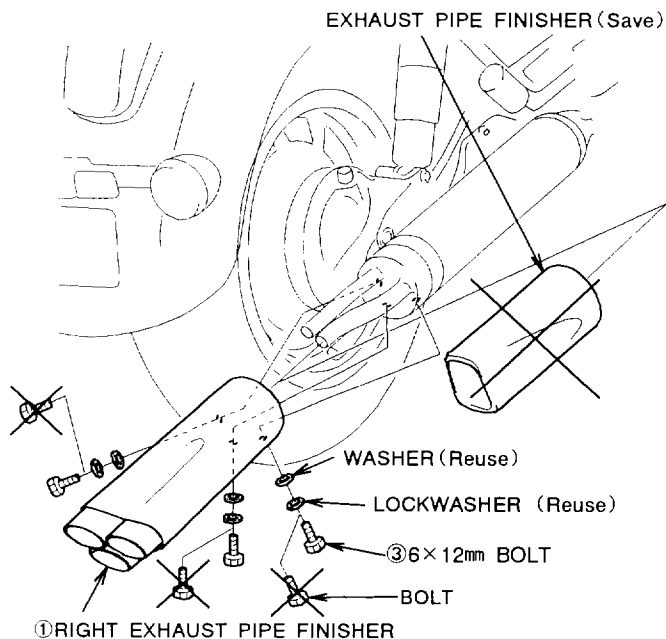

READ THE OWNER'S MANUAL CAREFULLY.
 The Owner's Manual has additional safety and operational information.